


Universal Sight Gauge Instructions

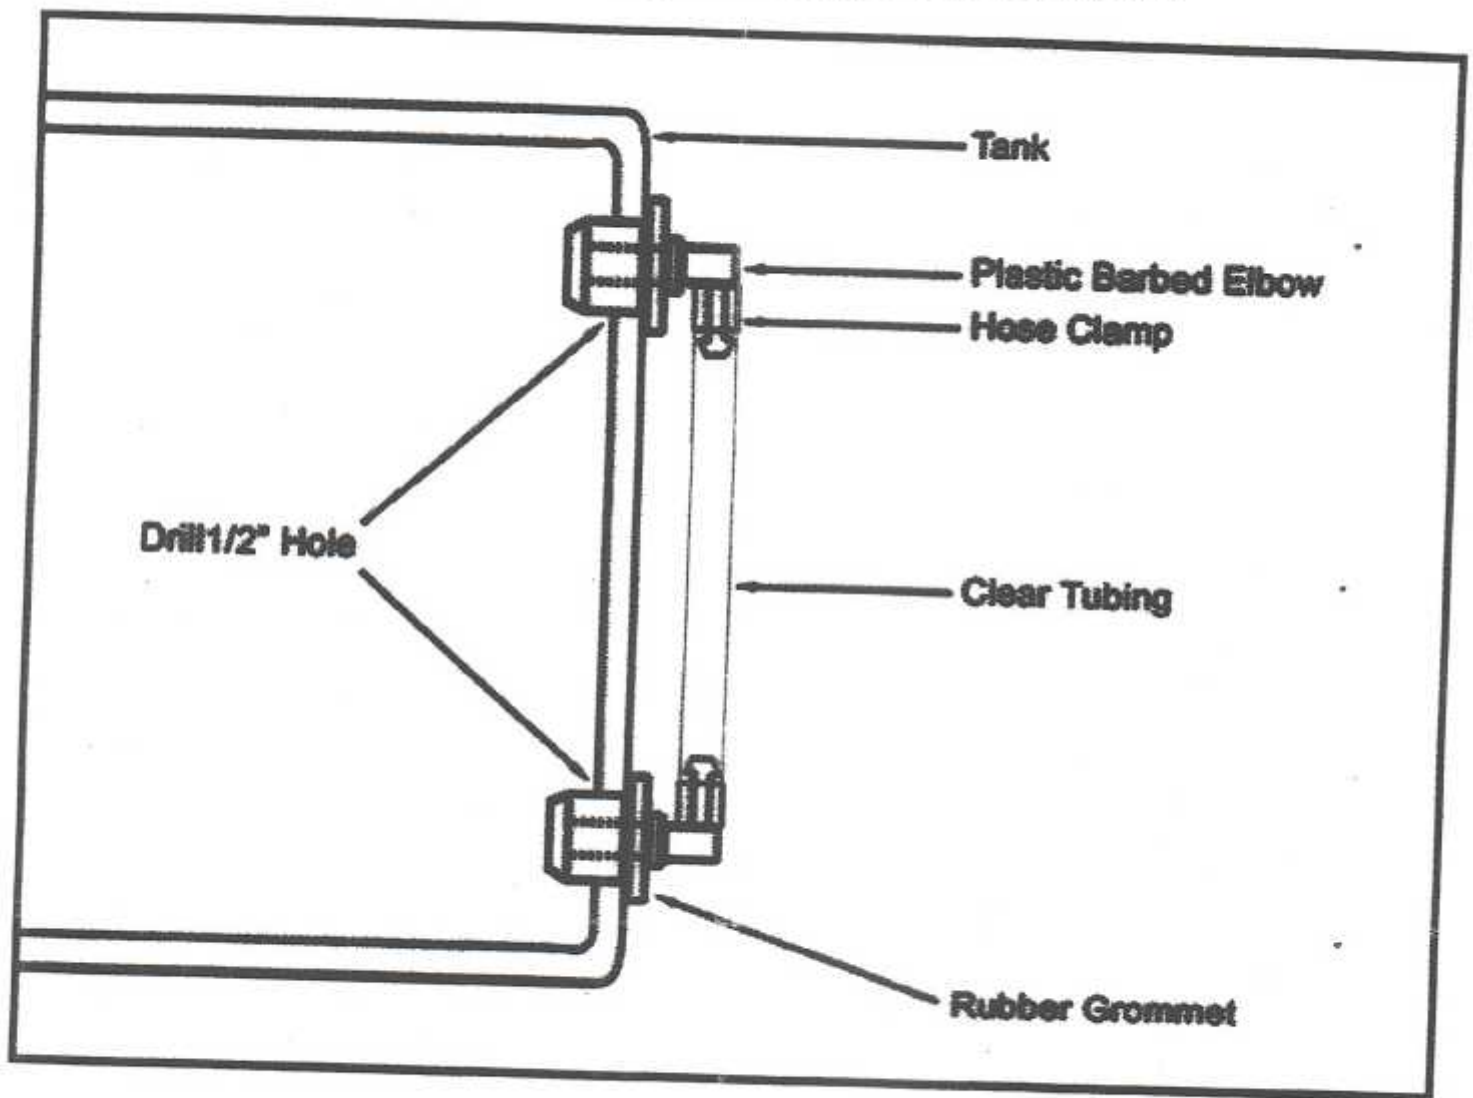

- Choose the desired location for where you want to mount the sight gauge.
- Drill two $\frac{1}{2}$ " holes. Make sure the holes are free of nicks or burrs to ensure good seal.
- Insert the supplied rubber grommets into the newly drilled holes.
- Insert the supplied plastic barbed fittings into rubber grommets.
- Using the supplied clear tubing. Cut tubing to length as needed.
- Using the supplied hose clamps. Slide hose clamps onto clear tubing.
- Connect the clear tubing securing it in place with the hose clamps.

WARNING

RINSE THE TANK OUT AND REMOVE ALL SHAVINGS THAT MAY BE INSIDE THE TANK AS THESE SHAVINGS CAN DAMAGE AND CAUSE THE PUMP TO FAIL.